Kerlite Limestone

Laminated Porcelain Tile | Reinforced with Fiberglass





Slate

Floating Floor System

Kerlite Easy is the FIRST dry laying installation system without adhesive certified and patented with Kerlite Plus. It is installed without mortar, and thanks to the exclusive use of fiberglass-reinforced Kerlite slabs, it is more durable than any other traditional laying system.





SILENT Lay the soundproof mat



DRY LAY TILES Lay the Kerlite tile on top



FILLER Use the finishing sealant to seal the grout lines. * Stocked in 2 colours






All images are for reference only and may not match physical product exactly. Shading and variation is inherent in ceramics and natural stone. Please inspect all products before installing, no claims accepted after installation.

Kerlite Limestone Laminated Porcelain Tile | Reinforced with Fiberglass

±5.5mm (Natural)

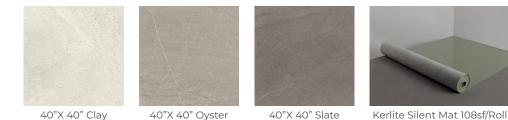

KLCL4055

V2 - Slight Variation

≥ 175 lbf

1 - Impervious

Wet DCOF >0.42

Yes

Intended for use on Floors and Walls in:

& Temporary Shops or Show Homes

Technical Specifications

V Rating (Variation)

Breaking Strength

Moisture Rating (MR)

(ISO 10545-4)

(ISO 10545-12)

Slip Resistance

Frost Resistance

Residential, Light Commercial, Trade Shows Stands

KLOY4055

KLSL4055



KSM108

EXCLUSIVE BENEFITS OF KERALITE EASY DRY LAYING SYSTEM

Stable



The fiberglass mesh on the reverse side of Kerlite slabs combined with the use of the SILENT mat and the FILLER sealant ensure the utmost resistance and the stability to the floor.



Fast

It is straightforward and quick to install.

Silent

It is soundproof: Thanks to the combined action of the SILENT mat and Kerlite.

It reduces footfall noise to the lower floor by approximately 16 times more than ordinary adhered ceramic tile floors.

Certified



Compliant with the strict American standard for flooring ASTM C627 (ROBINSON TEST).



More Attractive

Makes it possible to create a floor without expansion joints.

Environmentally Sustainable

Makes it possible to periodically replace the materials and reuse them in other environments.



Waterproof

With the combined use of Kerlite slabs and FILLER sealant, the floor is guaranteed to be entirely waterproof.



Lightweight



down the existing structure. Practical



Makes it possible to create an overlying ceramic surface without

demolishing the old floor.



Affordable

Provides significant savings as compared to a standard renovation



FOR ORDERING: Contact Kyle Glab - kglab@amestile.com / 604-312-1722

All images are for reference only and may not match physical product exactly. Shading and variation is inherent in ceramics and natural stone. Please inspect all products before installing, no claims accepted after installation.

